

GENERADORES

Generadores Gasolina



Válvulas en cabeza / Disyuntor térmico / Seguridad de aceite / 4 tiempos.

Ref. catálogo	03130003	03130004	03130005
Modelo	AY-3800-H-MN	AY-5000-H-MN	AY-8000-H-MN
Motor	HONDA GX-160A OHV 162 cc / 5,5 HP / 3.600 rpm	HONDA GX-270 (E) OHV 272 cc / 9,0 HP / 3.600 rpm	HONDA GX-390 OHV 390 cc / 13,0 HP / 3.600 rpm
Alternador	LINZ E1C10S3	LINZ E1C10S5	LINZ E1C10M8
Potencia máx (Kva / W)	3,8 / 3000	5 / 4200	8 / 6400
Potencia nominal (Kva / W)	3,2 / 2500	4,8 / 3850	7 / 5600
Tensión (V / Hz)	220 / 50	220 / 50	220 / 50
Consumo (L / H)	1,1 (75%)	1,8 (75%)	2,1 (75%)
Depósito (L)	3,6	6,0	6,5
Nivel sonoro (dB)	95	99	99
Peso (kg)	50	65	85
Arranque	Manual	-	-
Dimensiones (mm)	650 x 470 x 530	720 x 570 x 600	960 x 585 x 600



Válvulas en cabeza / Disyuntor térmico / Seguridad de aceite.

Ref. catálogo	03130006	03130007
Modelo	AY-3800-KT	AY-5000-KT
Motor	KIOTSU KT-168 196 cc / 6,5 HP / 3.600 rpm	KIOTSU KT-178 270 cc / 9 HP / 3.600 rpm
Alternador	LINZ E1C10S3	LINZ E1C10S5
Potencia máx (Kva / W)	3,8 / 3000	5,0 / 4100
Potencia nominal (Kva / W)	3,2 / 2500	4,8 / 3850
Tensión (V / Hz)	220 / 50	220 / 50
Consumo (L / H)	1,3 (75%)	1,8 (75%)
Depósito (L)	3,5	6
Nivel sonoro (dB)	99	99
Peso (kg)	50	65
Arranque	-	-
Dimensiones (mm)	650 x 470 x 530	720 x 570 x 600

Generadores Diesel



AY-4000




AY-6000

Disyuntor térmico / 4 tiempos.

Ref. catálogo	03130001	03130002
Modelo	AY-4000	AY-6000
Motor	YANMAR L-70 296 cc / 6,7 HP / 3.600 rpm	YANMAR L-100 406 cc / 10,0 HP / 3.600 rpm
Alternador	LINZ E1C 10 S5	LINZ E1C 10 M8
Potencia máxima (Kva/W)	5 / 4.100	6,5 / 5.200
Potencia nominal (Kva/W)	4,5 / 3.600	6 / 4.800
Tensión (V/Hz)	220 / 50	220 / 50
Consumo (L/H)	1,3 (75%)	1,7 / (75%)
Depósito (L)	3,5	5,5
Nivel Sonoro (dB)	100	100
Peso (kg)	80	85
Dimensiones (mm)	720 x 570 x 600	960 x 585 x 600


MOTOBOMBAS

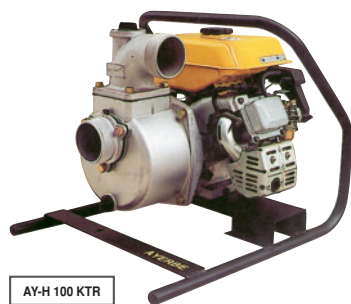

AY-H 100 KTR



AY-H 50 P

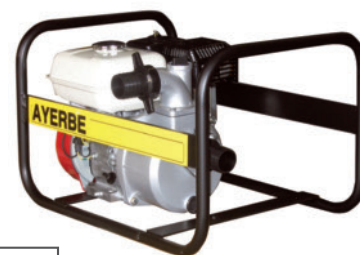

AY-80 KT

Válvulas en cabeza / Seguridad de aceite / 4 tiempos.

Ref. catálogo	03140001	0314002	03140003
Modelo	AY-H-50-P	AY-80 KT	AY-H-100 KTR
Motor	HONDA GX - 160 OHV 162 cc / 5,3 HP / 3.600 rpm	KIOTSU KT 168 OHV 196 cc / 6,5 HP / 3.600 rpm	HONDA GX 270 OHV 272 cc / 9,0 HP / 3.600 rpm
Bomba	ALUM VAC - 2P	ALUM VAC - 3	ALUM KTR - 100
Manguera (mm)	50	75	100
Presión (m)	50 (5 BAR)	20 (2 BAR)	20 (2 BAR)
Caudal (L/H)	30.000	60.000	80.000
Consumo (L/H)	1,1	1,1	1,8
Depósito (L)	3,9	3,6	6,5
Nivel Sonoro (dB)	95	95	99
Peso (kg)	29	29	51
Arranque	Manual	Manual	Manual
Dimensiones (mm)	500 x 450 x 450	330 x 260 x 340	550 x 450 x 550